


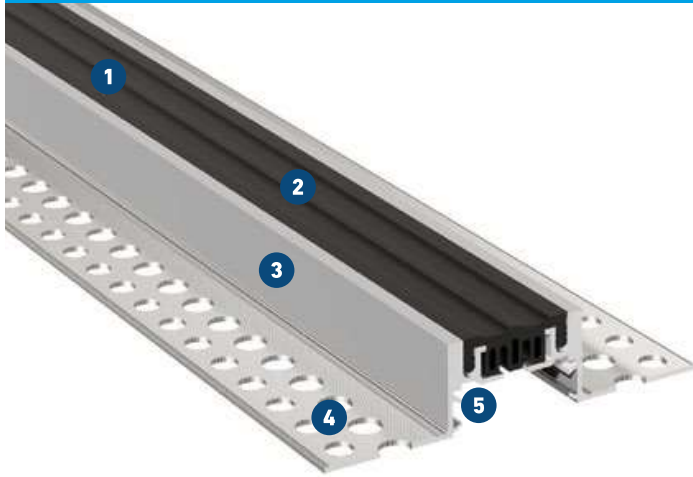

- 1 Flexible high quality elastomeric insert**
Hard wearing, temperature resistant (-30°C to +120°C), replaceable
- 2 Smooth visible surface for easy cleaning**
Antibacterial and physiologically safe
- 3 High load capacity due to sturdy construction**
Solid aluminium brackets
- 4 MultiHole mounting bracket**
for secure fixing
- 5 Quick and easy installation**
Solid, but light aluminium brackets for quick installation in screed or tiled floorings

Expansion joint cover	Joint width $b_f \text{ max}$ [mm]	Total movement Δb_f [mm]	Visible width b_s [mm]	Total width b_t [mm]	Joint height h [mm]	Load bearing capacity [kN]	Load bearing capacity* [kN]
FPG 55/20	50	8 (±4)	55	150	20	30	300
FPG 55/25	50	8 (±4)	55	150	25	30	300
FPG 55/35	50	8 (±4)	55	150	35	30	300
FPG 55/50	50	8 (±4)	55	150	50	30	300
FPG 55/75	50	8 (±4)	55	150	75	30	300

* no continuous use

For installation in asphalt, please ask for our technical advice.
Larger installation heights on request.

Production length: 4 m

Standard colours: black, grey, beige

Wall connections: E1, E3, E4

