

Soporte antivibratorio, para la construcción de techos acústicos o soportación de máquinas con régimen de trabajo por encima de 1.200 r.p.m.

- ✓ Los soportes de caucho alcanzan frecuencias de 12 - 15 Hz.
- ✓ Los soportes de muelle alcanzan frecuencias de 3,5 - 5Hz.

Estos soportes, están fabricados con materiales de gran calidad. Todas las piezas metálicas llevan protección de alta resistencia contra la corrosión.

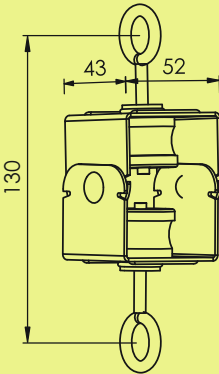


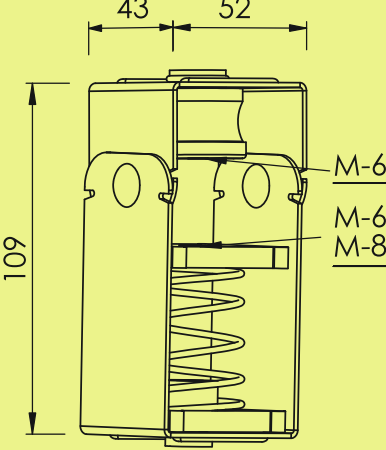




- Los datos no serán utilizados como documento de control.
- Reservado el derecho de modificación en construcción y medidas.

This range of anti-vibration mount is design for suspension of false ceiling and machinery operating at more than 1.200 r.p.m.

- ✓ The rubber mounts reach frequencies of 12 to 15 Hz.
- ✓ The spring supports reach frequencies of 3.5 - 5 Hz.

These suspended ceiling hangers are made of high quality materials. All metal parts are high resistance protective against corrosion.

- Data base will not be used as docs. control.
- Subject to modification in construction and measures.

Dimensiones Dimensions	Imagen Image	Carga (Color) Load (Colour)	Código Code
		8 - 30 Kg. Gris Gray	3704501
		20 - 60 Kg. Negro Black	3706001
		5 - 10 Kg. Amarillo Yellow	3701005
		10 - 20 Kg. Verde Green	3702005
		15 - 30 Kg. Azul Blue	3703005
		30 - 60 Kg. Rojo Red	3706005