




Glue is attached on the tooth milling.

Then the tooth millings are connected.**

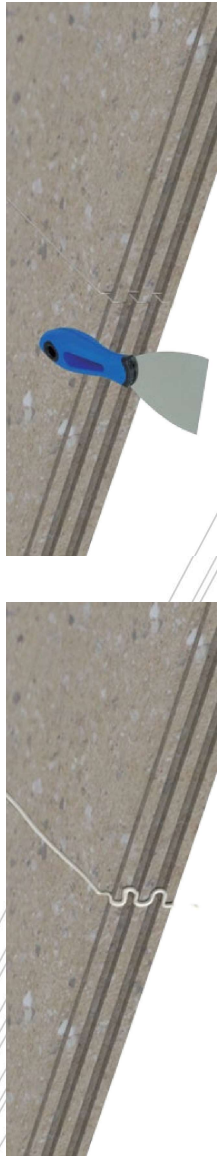


If there is enough glue, it will swell out.

Remove the excess adhesive after curing with a spatula.

** Also panels with spigot and groove binding available.

Size

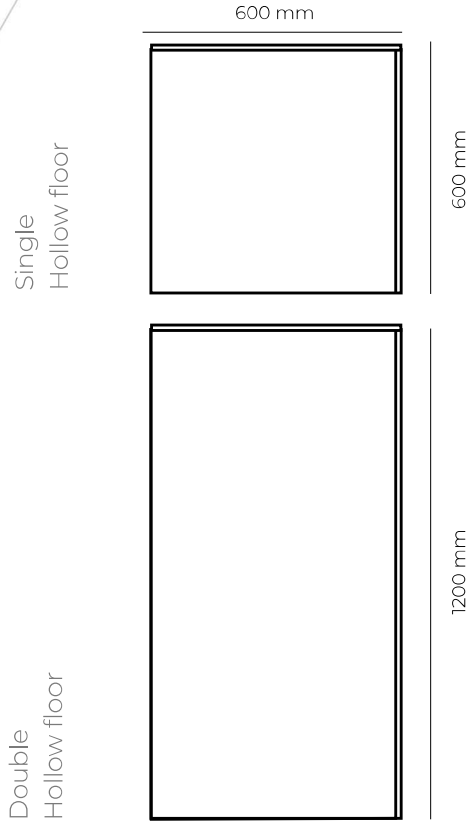

For load increase and for doubling for sensitive floor coverings.

Element acc. to EN 15283-2	Element effective measurement mm	Element thickness mm	Weight (Density 1500kg / m³) approx. kg / pcs.
Tongue and groove			
FHB 25	1200 x 600	25	27,0
FHB 25	600 x 600	25	13,5
FHB 28	1200 x 600	28	30,2
FHB 28	600 x 600	28	15,1
FHB 32	1200 x 600	32	34,6
FHB 32	600 x 600	32	17,3
FHB 38	1200 x 600	38	41,2
FHB 38	600 x 600	38	20,6

Element acc. to EN 15283-2	Element effective measurement mm	Element thickness mm	Weight (Density 1500kg / m³) approx. kg / pcs.
LEP 13	1200 x 600	13	14,1
LEP 18	1200 x 600	18	19,5

Element acc. to EN 15283-2	Element effective measurement mm	Element thickness mm	Weight (Density 1500kg / m³) approx. kg / pcs.
tooth milling			
FP 410-25	600 x 600	25	15,2 kg
FP 410-28	600 x 600	28	16,1 kg
FP 410-30	600 x 600	30	18,3 kg
FP 410-32	600 x 600	32	19,0 kg
FP 410-34	600 x 600	34	21,6 kg
FP 410-36	600 x 600	36	23,5 kg
FP 410-38	600 x 600	38	24,2 kg
FP 410-40	600 x 600	40	24,9 kg